

AX 200

X-Ray Film Processor

➤ Easy To Operate

➤ Small Footprint

➤ Runs Quiet & Cool

➤ Cost Effective



Featuring an...

Advanced Digital Control System for:

- Developer Temperature & Calibration Settings
- Dryer Temperature Setting
- Replenishment Rate Adjustments
- Auto Fill Function
- Plus Many Other User-Friendly Features


AX 200

X-Ray Film Processor

EASY MAINTENANCE

Front electrical section provides access to...

- Electronics
- Replenisher Pump
- Feed Switch
- Main Drive Motor

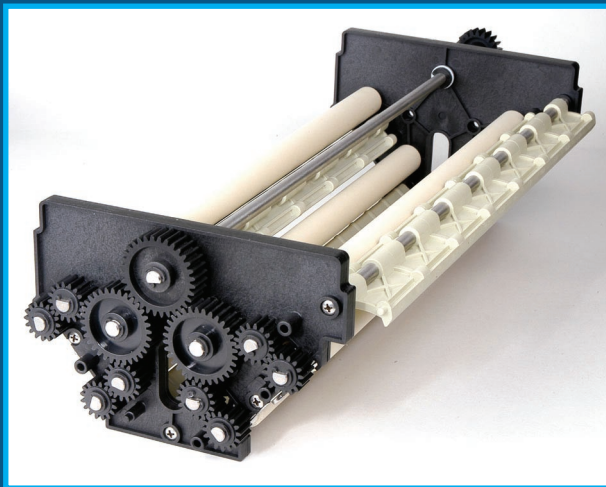


The AX 200's Modular Rack design makes replacing gears and rollers a simple procedure.

SPECIFICATIONS

Film Format:	Sheet Films
Processing Time:	105 Seconds (Lead Edge to Lead Edge)
Processing Capacity:	75, 14 in X 17 in films/hr (35 cm X 43 cm)
Dimensions:	
Processor:	Height: 16 in (40 cm) Width: 23.15 in (58.8 cm) Length: 31 in (78.6 cm)
Base:	Height: 25 in (63.5 cm)
Weight:	77 lbs (35 kg) without fluids
Water Consumption:	0.5 Gal (1.9 L) per min processing
Tank Capacities:	1.1 Gal (5 L) Developer 1.1 Gal (5 L) Fixer 1.25 Gal (5.6 L) Wash
Power Requirements:	120 V 15A 50/60 Hz

Specifications Subject To Change Without Notice

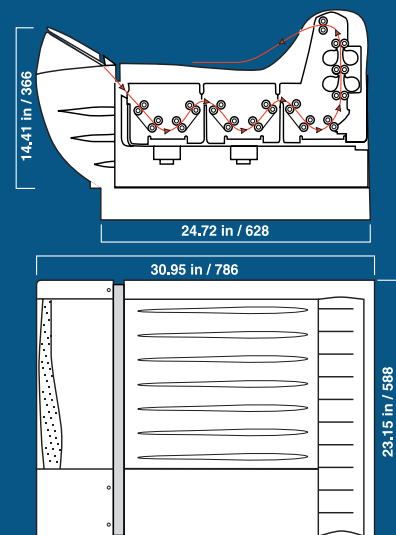

Alphatek Corporation
2000 South 25th Avenue
Broadview, IL 60155
Phone: (708) 345-0500
FAX: (708) 345-3090
www.alphatekcorp.com